

TILT BED EQUIPMENT SPECIFICATIONS

12K SET-BACK JACK




16K Models

DROP-IN TOOLBOX



Optional

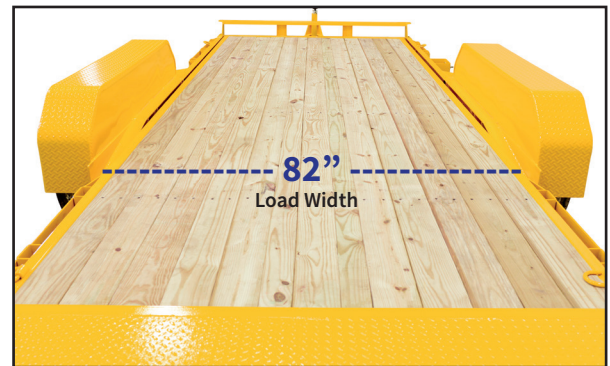

Shown in Color Option Construction Yellow

SURE-TRAC DIFFERENCE

Tapered Entry for Full-Width Loading
 HD Slipper Spring Axle (14K Model)
 Sealed Brake Connections
 EverLink™ - High Performance Wiring Harness
 Hydraulic Dampener
 HD Bulkhead

FEATURES

Pressure Treated 2 x 6 Decking
 Easy-Lube Hubs
 4" Drop Axles
 Radial Tires
 Set-Back Jack
 Adjustable 2-5/16" Coupler (14K Model)
 C-Channel Full Wrap Tongue
 All LED Lights
 HD Diamond Plate Knife Edge Tail
 Nested Frame
 HD Reinforced Tread Plate Fenders
 Rear Board Retainers
 Stake Pockets and Rub Rail
 (4) 1/2" D-Rings (10K & 14K Models)
 (4) 5/8" D-Rings (16K Models)
 Spare Tire Carrier
 Extended Tongue
 Powder Coat Finish

OPTIONS

Coupler
 Jack
 Drop-In Toolbox
 Wheel Upgrades
 Color Options

Contact Local Dealer For More Options

SURE-TRAC

By Novae®

SMART - CONFIDENT - PROVEN

TILT BED EQUIPMENT SPECIFICATIONS

		10K	14K	16K
GVWR		9900	14000	16000
GAWR		5200	7000	8000
Curb Weight	16'	2880	3120	3740
	18'	3120	3320	4020
	16' + 4'	3220	3520	4220
	18' + 4'	3430	3730	4430
Payload	16'	7020	10880	12260
	18'	6780	10680	11980
	16' + 4'	6680	10480	11780
	18' + 4'	6470	10270	11570
Frame	6" C-Channel and Tube		8" C-Channel and Tube	
Cross Members	3" C-Channel (16" On-Center)			
Tongue	6" C-Channel		8" C-Channel	
Coupler	2-5/16 A-Frame	Adjustable 2-5/16	Adjustable 4 Bolt Pintle	
Jack	7K Dropleg		HD 12K Dropleg	
Fenders	HD Tread Plate			
Axles	Easy Lube Cambered Brake w/4" Drop			
Suspension	Eye to Eye Spring	Slipper Spring		
Tires	225/75R15 LRD	235/80R16 LRE	215/75R17.5 LRH	
Wheels	15", 6 on 5.5, Radial	16", 8 on 6.5, Radial	17.5", 8 on 6.5, Radial	
Decking	2 x 6 Treated Pine			
Lights	All LED Lights			
Electric Plug	7 Pole RV Molded Flat Blade			
Finish	Powder Coated High Gloss Black			
Length (Overall/Bed)	18'	285"/222"		
	18' + 4'	333"/270"		
Between Fenders	82"	82"	82"	
Deck Height	20"	20"	20"	
Coupler Height	18"	Adjustable 2-5/16		
Tilt Angle	11.5 Degree Tilt Angle			

